

Bidirectional Power Module Specification

TPS-BM1512KTIRF/TPS-BM1613KTIRF





Features

- AC three-phase without neutral line, no neutral line current
- Three-phase AC-DC bidirectional isolation and energy flow, reliable inverter in grid-connected system
- Mature and excellent soft switching technology, more reliable and efficient
- High efficiency in both directions, saving energy consumption expenses for customers
- Bidirectional high PF >0.99, low THDi <5%
- Bidirectional switch with seamless voltage, meeting the fast response requirements of test equipment
- Excellent EMC, meeting EN55032 and other international standards
- Strong adaptability, adapts to unstable grids and harsh environments, no derating at 45°C
- Modular design, intelligent expansion, automatic parallel operation
- Perfect fault protection function
- Can pass UL, CE, TUV certification

Applications

- Cell formation and test equipment
- Power bidirectional test equipment
- Energy recyclable power aging equipment

Profile

TPS-BM Three-phase LV AC-DC BPM

TPS-BM three-phase AC-DC BPM adopts advanced three-phase none neutral line technology to realize AC-DC bidirectional energy conversion in three-phase system, completely solves the problem of neutral line current in the power system. The mature soft switching technology is also adopted. The module provides high performances such as high reliability, strong adaptability of grids and environments, bidirectional seamless switching without voltage difference, high efficiency, low THDi, high PF, high power density.

Specification

Product Model		TPS-BM1512KTIRF	TPS-BM1613KTIRF	
AC To DC Direction	Rated Output Capacity	12000W	13000W	
	AC Input	Wiring Mode	3Ph+PE	
		Rated Voltage	380/400/415VAC	
		Voltage Range	323~456VAC	
		Frequency Range	50/60 ± 5Hz adaptive control	
		Input Current	≤ 24A	≤ 26A
		THDi	<5% @380VAC, full load, power grid THDu ≤ 2%	
		PF	0.99 @380VAC, full load, power grid THDu ≤ 2%	
	DC Output	Rated Voltage	15VDC	16VDC
		Rated Current	800A	812.5A
Voltage Accuracy		± 1%		
Ripple Voltage		1V		
Peak Efficiency		91%@415VAC	91%@415VAC	

AC To DC Direction	Rated Input Capacity		9600W	10400W
	DC Input	Rated Voltage ^①	15VDC	16VDC
		Rated Current	640A	650A
	AC Output	Voltage Range	323~456VAC	
		Frequency Range	50/60 ± 5Hz adaptive control	
		THDi	<5% @380VAC, full load, power grid THDu ≤2%	
		PF	0.99 @380VAC, full load, power grid THDu ≤2%	
Peak Efficiency		90.5%@415VAC	90.5%@415VAC	
Complete Machine	System	Power Direction	Bidirectional	
		Isolation Method	High frequency isolation	
		Cooling System	Forced air cooling, intelligent control	
		Air Flow	Default: Front inlet and rear outlet, R type: Rear inlet and front outlet(front: fan; rear: terminal)	
		Expandability	Up to 4 units connected in parallel	
		Non-balance of Current Sharing	≤5%	
	Environment	Operation Temperature ^②	-10°C~45°C full load, 45°C~60°C power derating to 90%	
		Storage Temperature	-40°C~70°C	
		Relative Humidity	5~95%(no condensing)	
		Operation Altitude	<1000m; 1000m~3000m, power derating 1% per 100m rising	
	Interface	Indicator Lamp	Operation: Blue	Fault: Red
		Communication	CAN	
	Mechanical	Size(W*H*D)	268mm*86mm*435mm	
		Weight	≤10kg	≤10.5kg

Note:


- ① DC side voltage exceeding 20VDC will cause power failure
- ② Shut down due to over temperature after overload




This electronic device must not be disposed of in the household waste at the end of its service life. For your return, there are free collection points for electrical appliances and, if necessary, additional points of acceptance for the reuse of the devices in your area. The addresses can be obtained from your city or communal administration. If the old electrical or electronic device contains personal data, you are responsible for deleting it before you return it. Further information: www.elektrogesetz.de

Dimension

• TPS-BM1512KTIRF/TPS-BM16V13KTIRF Installation Structure

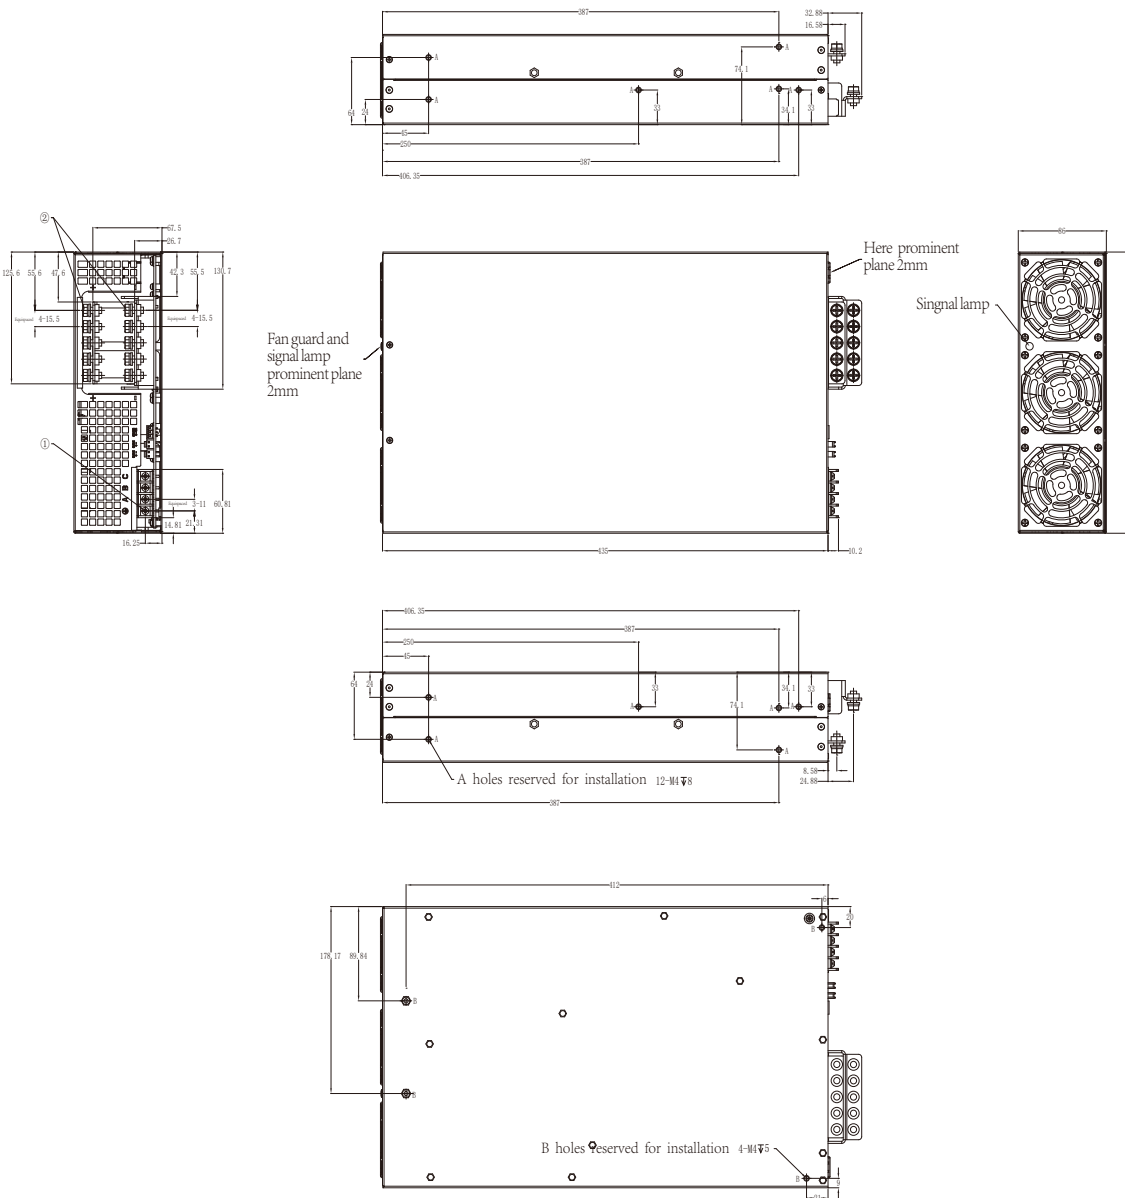

• Identification explanation



Serial number	Type	Name	Specification	Quantity	Tightening torque
②	Output terminal fastening screws	GB907413-88 series cross slot hexagon head spring flat washer combination screws	M6X12	10pcs	7N·M
①	Input terminal fastening screw	Cross recessed pan head flat washer combination screw	M4X8.5	4pcs	1.5N·M

• Warning

1.The length of the screw shall not exceed the depth of the hole in the drawing when the screw is installed at the reserved hole position (∇). Otherwise it will cause damage to the equipment.

Dimensional tolerance (GB1804-M level)	0.5-6	±0.1	Unit	Proportion	Projection identification
	6-30	±0.2			
	30-120	±0.3			
	>120	±0.5			