

Features





- Wide input voltage range
- Overload, and Short-Circuit Protection
- Low Power, Compact Size, High Efficiency
- Compliant with CE Certification Requirements
- Full Load Burn-In Test

Specifications				
Model		TPS-YSU36SL-5V	TPS-YSU36SL-12V	TPS-YSU36SL-24V
Output	Output Voltage	5V	12V	24V
	Rated Current	5A	3A	1.5A
	Current Range	0-5A	0-3A	0-1.5A
	Ripple (Max)	60mVp-p	100mVp-p	120mVp-p
	Voltage Range	4.5-5.5V	11.5-12.5V	23.2-24.6V
	Output Accuracy	±1%	±1%	±1%
	Voltage Regulation Rate	±1.1%	±1.1%	±1.1%
	Load Regulation Rate	±1.2%	±1.2%	±1.2%
	Rated Power	25W	36W	36W
	Efficiency	80	84.5%	87.0%
Input	Start-up、 Rise、 Hold-up Time	300ms/50ms/50ms@24VAC		
	Input Voltage Range	100~240VAC		
	Input Current	<0.5A(Average Current 0.22-0.35A)		
	Input Frequency	47-63Hz		
	Inrush Current	Cold Start: <50A@230VAC		
Protection	Leakage Current	<10mA@220VAC		
	Overpower Protection	135-170% of rated power(13-15A), with automatic recovery after fault removal.		
	Overvoltage Protection	VH1: >35%		
	Short Circuit Protection	Hiccup mode: Automatically recovers after short circuit removal.		
Environmental	Operating Temperature/Humidity	"-25~+50°C @100% Load,+60°C@60% Load. 20~90%RH"		
	Storage Temperature/Humidity	"-40~85°C, 10~95%RH"		
Safety and EMC	Safety/EMC	EN61000-3-2-3/EN 61000-4-4/EN55022 CLASSB		
	Withstand Voltage	I/P-O/P: 2.0KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC 1min.		
	Insulation Resistance	I/P-O/P, I/P-FG, O/P-FG: 500VDC/100M Ohms 25°C 70%RH		
Other	Dimensions(L*W*H)	76×42×25mm		
	Weight	about 45g		

Notes



1. All parameters are measured under the following conditions: rated input voltage of 220V AC, rated load, ambient temperature of 25°C, and humidity of 70%.
2. Accuracy: Includes setting error, voltage regulation, and load regulation.
3. Ripple testing: Connect the power supply and load with a 30CM twisted pair. The load is connected with a 0.1µF ceramic capacitor and a 47µF capacitor, and measured at the load end using a 20MHz oscilloscope.
4. Voltage regulation: Measured with the input voltage varying from low to high under rated load conditions.
5. Load regulation: Measured with the output varying from 0% load to 100% load.
6. Each channel can output the maximum current, but the total load across all channels must not exceed the maximum output power.

Characteristic Curve

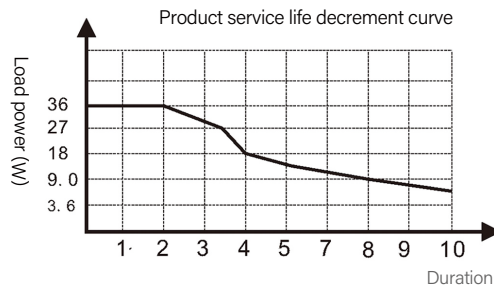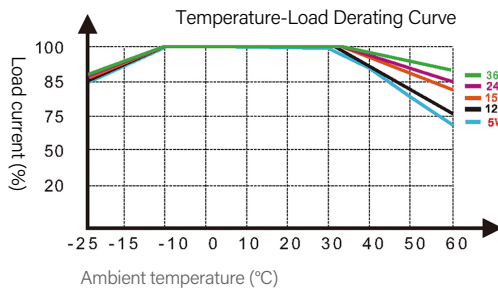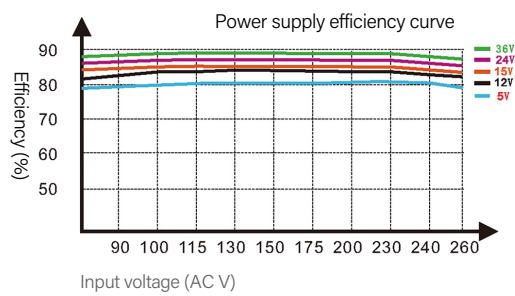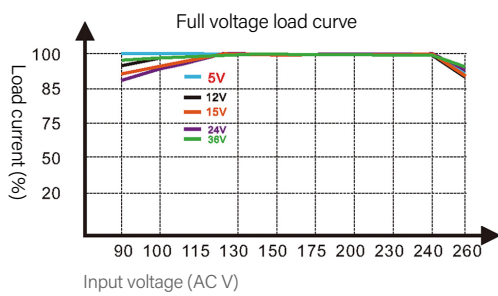

Mechanical Dimensions

mm

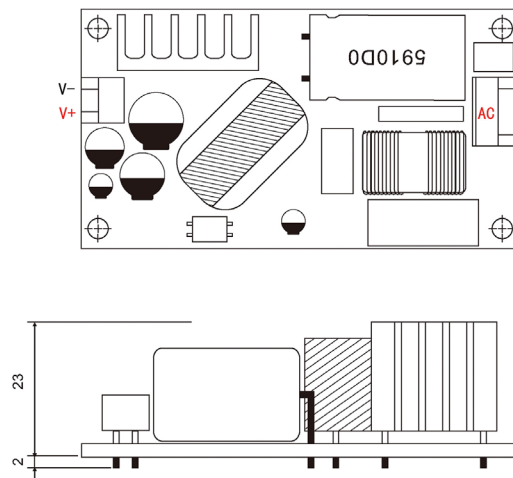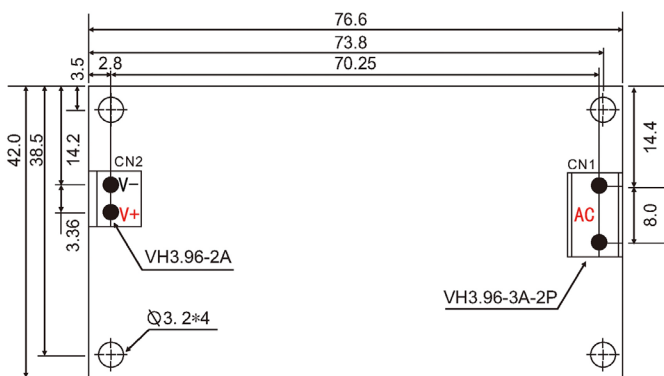

This electronic device must not be disposed of in the household waste at the end of its service life. For your return, there are free collection points for electrical appliances and, if necessary, additional points of acceptance for the reuse of the devices in your area. The addresses can be obtained from your city or communal administration. If the old electrical or electronic device contains personal data, you are responsible for deleting it before you return it. Further information: www.elektrogesetz.de